



BugEye™



SCREW-LOCK BALL EXTENDED COOLANT NOZZLE FOR CNC LATHES

- Extended ball socket provides greater range of aimability than the BlackEye while still being relatively compact
- Ideal for tool positions where tool tip is difficult to reach with standard screw-lock ball (i.e. short tool projections)
 - Rated to 150 PSI maximum
 - Sizes available to fit almost every machine or toolholder
 - Choose the orifice diameter to suit your application



DIMENSIONS IN INCHES (except as noted)

Part No.	Nominal Dia. "D"	Orifice Dia. "d"	L
BUG02305	12 mm	.11	1.10
BUG02310	12 mm	.16	1.10
BUG02315	14 mm	.11	1.20
BUG02320	14 mm	.16	1.20
BUG02325	15 mm	.11	1.23
BUG02330	15 mm	.16	1.23
BUG02335	22 mm	.11	1.50
BUG02340	22 mm	.16	1.50
BUG02345	1/2 inch	.11	1.12
BUG02350	1/2 inch	.16	1.12
BUG02355	5/8 inch	.11	1.23
BUG02360	5/8 inch	.16	1.23

Material: Body: Acetal
Ball: Stainless Steel

Maximum Pressure:
150 PSI (10 bar)

Maximum Operating Temperature: 160°F

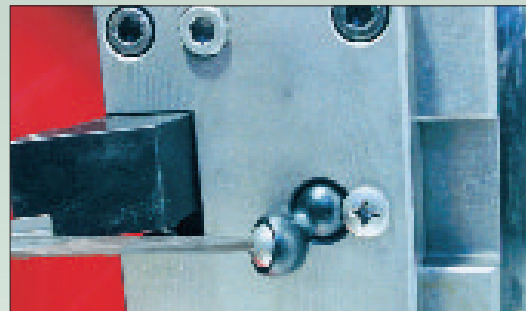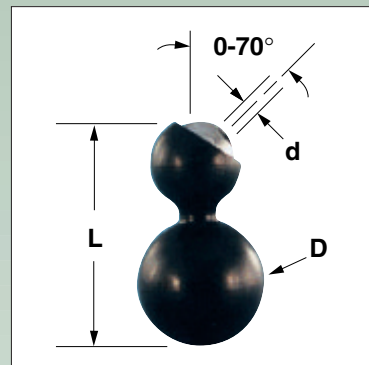

BugEye shown installed on CNC turning center.

Ordering Information: Measure the diameter of the original ball in your machine and order the nominal diameter to suit.